

Around the world We Move Fuel

Motor Components, LLC.

WE MOVE FUEL.™



Home






Facet® Cube Fuel Pumps

- Fuel Compatibility: All models of the Facet Cube Fuel Pumps are compatible with gasoline, diesel, biodiesel, blended alcohol fuels and fuel additives.
- Solid State Reliability: Proven on thousands of original equipment applications. No electrical contacts. No bearings or diaphragms to wear out or fatigue. Lasts four to five times longer than many other electric fuel pumps.
- Easy to Install: Two-bolt installation plus the small size makes installation easy. For best results, mount the pump close to the fluid or fuel tank and below the liquid level.
- Eliminates Vapor Lock: When properly installed on most vehicles a constant, smooth, dependable supply of fuel under pressure is assured in the hottest weather or in high altitudes.

Available Features:

- 12 - 84 inches minimum dry lift
- 6 - 34 GPH
- 1 - 11.5 PSI
- Transient Protection
- State of the art Electronics
- Sealed Electronics
- Reverse Polarity protection
- Built in check valve
- Built in Anti-Siphon Valve (Positive shut-off)
- UL Certified
- ELV Compliant
- 1.6 amp average
- Self Priming and Self Regulating
- 18 ounces and 3 inches
- Corrosion Resistant over 100 hours of salt spray
- Operating Temperature Range: -40F to 180F
-

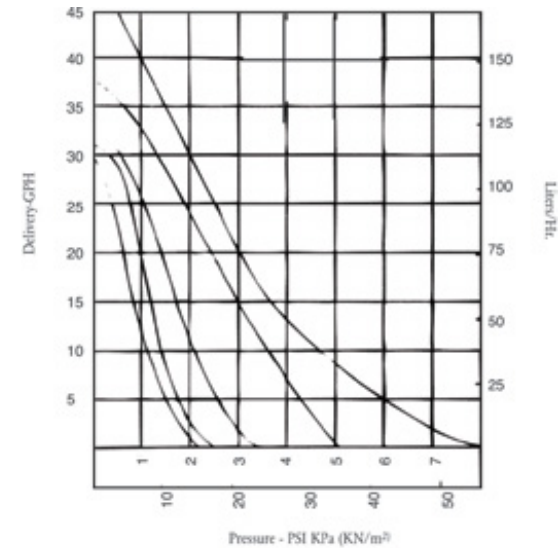

12 VOLT FACET® CUBE FUEL PUMPS

PART #	MAX-MIN PSI	GPH	POSITIVE LEAD CONNECTOR	NEGATIVE LEAD CONNECTOR	INLET/OUTLET THREAD SIZE	MIN. DRY LIFT (")	CHECK VALVE	POSITIVE SHUT-OFF
40104	4. - 1.5	25	N/A	.25 RING	1/8-27 INT	12	N	N

40105	4.5 - 3	30	N/A	.25 RING	1/8-27 INT	12	N	N
40106	7. - 4	32	N/A	.25 RING	1/8-27 INT	12	N	N
40107	10. - 7	38	N/A	.25 RING	1/8-27 INT	12	N	N
40108	6 - 4.5	32	.25 BLADE	.25 RING	3/8 FLARE	12	N	N
40109	7 - 4.0	32	N/A	.25 RING	3/8-18 INT	24	Y	N
40135	7 - 4.	32	PACKARD	.25 RING	1/8-27 INT	12	N	N
40136	7 - 4.	32	PACKARD	.25 RING	1/8-27 INT	12	N	N
40137	7 - 4.	32	PACKARD	.25 RING	3/8-18 INT	24	Y	N
40138	7 - 4.0	32	PACKARD	.25 RING	1/8-27 INT	24	Y	N
40147	9 - 4.5	32	.25 BLADE	.25 RING	1/8-27 INT	24	Y	N
40148	4.5 - 2	24	.25 BLADE	.25 RING	1/8-27 INT	24	Y	N
40163	2.5 - 1.5	17	.25 BLADE	.25 RING	1/8-27 INT	24	Y	N
40166	39 -25	9	175 BULLET	..	1/8-27 INT	..	Y	N
40171	3.5 - 2	15	PACKARD	.25 RING	1/8-27 INT	12	Y	Y
40176	5 - 3.5	19	N/A	.25 RING	1/8-27 INT	36	Y	Y
40177	2. - 1	7	N/A	.25 RING	1/8-27 INT	24	Y	Y
40178	3.5 - 2	15	N/A	.25 RING	1/8-27 INT	36	Y	Y
40185	11.5 - 9	32	N/A	.25 RING	1/8-27 INT	36	Y	N
40189	5 - 3.5	15	AMP	.25 RING	1/8-27 INT	36	Y	Y
40217	3.5 - 2	15	.156 BULLET	.25 RING	1/8-27 INT	36	Y	Y
40229	6 - 4.5	32	PACKARD	..	1/8-27 INT	12	N	N
40232	10. - 7	34	PACKARD	..	1/8-27 INT	12	N	N
40241	3.5 - 2	15	.157 BULLET	.25 RING	FEMALE FLARE	36	Y	Y
40252	1.5 - 1	6.5	PACKARD		1/8-27 INT	24	Y	Y
40254	4 - 1.5	25	N/A		1/8-27 INT	24	Y	N
40257	11.5 - 9	25	N/A		1/8-27 INT	84	Y	Y
40272	11.5-9	32	PACKARD		1/8-27 INT	36	Y	N

24 VOLT FACET® CUBE FUEL PUMPS

PART #	MAX-MIN PSI	GPH	POSITIVE LEAD CONNECTOR	NEGATIVE LEAD CONNECTOR	INLET/OUTLET THREAD SIZE	MIN. DRY LIFT (")	CHECK VALVE	POSITIVE SHUT-OFF
40151	9 - 4.5	32	N/A	.25 RING	3/8-18 INT	24	Y	N
40154	6 - 4.5	32	.25 BLADE	.25 RING	3/8 FLARE	12	N	N
40164	6 - 4.5	32	N/A	.25 RING	1/8-27 INT	12	N	N
40193	30	10	N/A	.25 RING	1/4-18 INT	24	N	N
40194	6.5 - 5	23	N/A	.25 RING	1/8-27 INT	72	Y	Y
40221	3.5 - 2	25	N/A	.25 RING	1/8-27 INT	24	N	N